


Specifications

Inquiry

- Two speeds operation,increasing the work efficiency
- Light weight and compact design
- With safety valve inside,providing safe dual protection

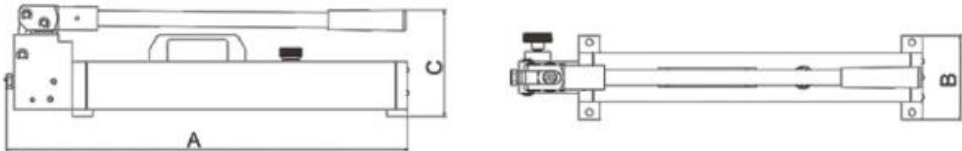

ModelNo	Usable Oil	Pressure Rating (Bar)		Oil capacity(cm³)		Dimension (mm)			Oil Port	W
	(cm³)	1st Stage	2nd Stage	1st Stage	2nd Stage	A	B	C		(kg)
HPP-1000	2000	30	1000	31	1.65	700	150	190	G1/4"	8
HPP-1500	2000	20	1500	16	1	700	150	190		10
HPP-2000	3000	20	2000	31	1.2	720	130	240		12
HPP 2800	2000	20	2800	18	2.6	730	150	190		14